


TOP RAIL 1 5/8" O.D.
GSP SCHED. 40

2 1/2" O.D. GSP
SCHED. 40 SPACED
AT 10'-0" MAX.

7 GA. AL. COATED
SPR. COIL TENSION
WIRE

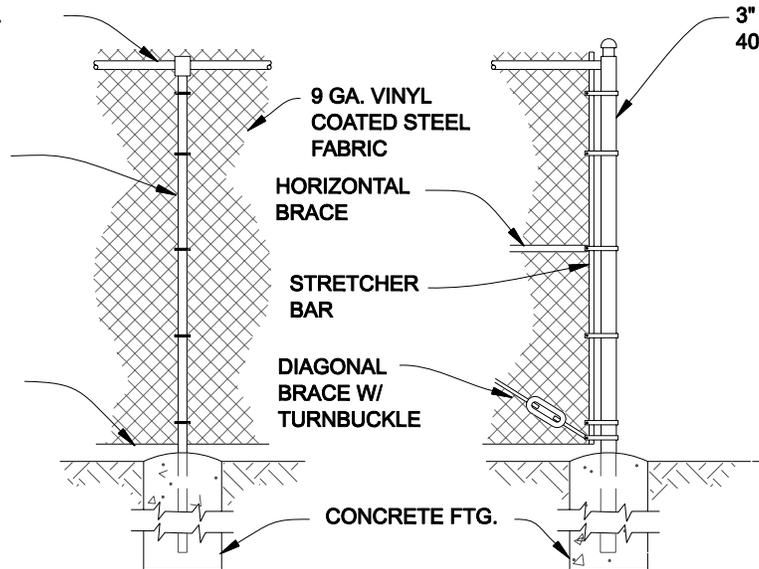

3" O.P. GST. SCHED.
40 AT CORNER

CONCRETE FTG.

LINE POST

CORNER POST


GATE RAIL & POSTS 1 5/8"
O.D. GSP SCHED. 40

STRETCHER BAR

DROP BAR W/
PADLOCK AND
HASP

DIAGONAL BRACE
ROD W/ TURNBUCKLE

1" DIA. SCHED. 40
IN CONCRETE FTG.

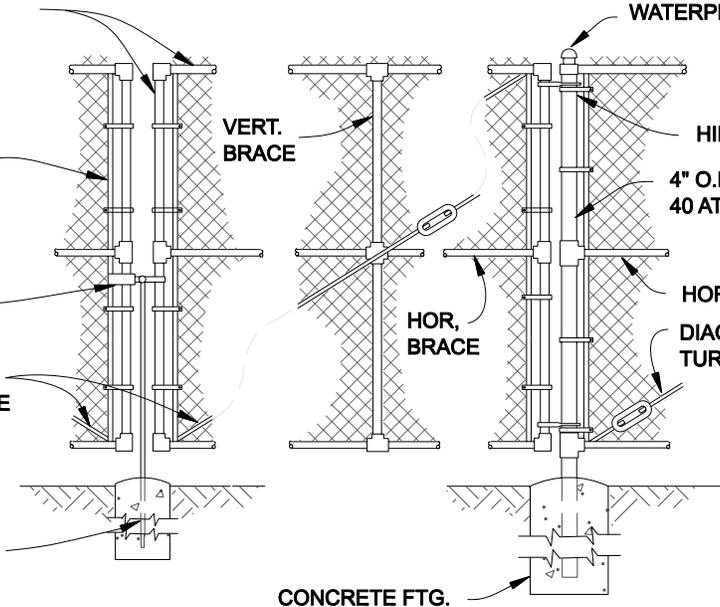

WATERPROOF CAP

VERT.
BRACE

HINGE (2)

4" O.D. GSP SCHED.
40 AT GATE OPENING

HOR.
BRACE

HORIZONTAL BRACE
DIAGONAL BRACE W/
TURNBUCKLE

CONCRETE FTG.

GATE

GATE POST

NOTES:

1. GATE TO BE 12'-0" CLEAR OPENING.
2. VINYL COATED STEEL WOVEN WIRE FABRIC TO BE STRETCHED TAUT W/STRETCHER BARS AND STRAPS AND FASTENED TOP & BOTTOM AND AT LINE POSTS WITH GALV. PIG RING TIES.
3. GATE TO BE SECURED OPEN WITH GATE STOP SET IN CONCRETE.

LBPH INC. - CADD FILE NAME: L:\CAD-DETAILS\SLC\SLC-G22.DWG



ST. LUCIE COUNTY
WATER & WASTEWATER
CONSTRUCTION STANDARDS

FENCE DETAIL

DRAWING NUMBER: G-22